

Concentric Reducer



Flange Type: ANSI 150LBS

Frame Available : ASTM A234 grade WPB, in compliance with ANSI B16.28 or SG Iron as per IS 1865-1991


Steel Tee Pc : According to SCH 40 up to 8", according to SCH 20 from 10" to 12".

Flange : ASTM A105, in compliance with ANSI B16.5/Class 150lbs; JIS 10K or DIN is also available on request

Standard : One loose flange, two loose flanges are available on request

Lining Available : PTFE/FEP/FEA

Sizes		L	N1			N2		
N1	N2		ØP	ØF	T	ØP1	ØF1	T1
MM	MM	MM	MM	MM	MM	MM	MM	MM
40	25	114	127	73	17.5	108	51	14.3
50	25	127	152.4	92	19	108	51	14.3
50	40	127	152.4	92	19	127	73	17.5
65	25	127	177.8	104.8	22.2	108	51	14.3
65	40	127	177.8	104.8	22.2	127	73	17.5
65	50	127	177.8	104.8	22.2	152.4	92	19
80	25	152	190.5	127	23.8	108	51	14.3
80	40	152	190.5	127	23.8	127	73	17.5
80	50	152	190.5	127	23.8	152.4	92	19
80	65	152	190.5	127	23.8	177.8	104.8	22.2
100	25	178	228.6	157	23.8	108	51	14.3
100	40	178	228.6	157	23.8	127	73	17.5
100	50	178	228.6	157	23.8	152.4	92	19
100	65	178	228.6	157	23.8	177.8	104.8	22.2
100	80	178	228.6	157	23.8	190.5	127	23.8
150	25	229	279.4	216	25.4	108	51	14.3
150	40	229	279.4	216	25.4	127	73	17.5
150	50	229	279.4	216	25.4	152.4	92	19
150	80	229	279.4	216	25.4	190.5	127	23.8
150	100	229	279.4	216	25.4	228.6	157	23.8
200	25	279	342.9	270	28.6	108	51	14.3
200	40	279	342.9	270	28.6	127	73	17.5
200	50	279	342.9	270	28.6	152.4	92	19
200	80	279	342.9	270	28.6	190.5	127	23.8
200	100	279	342.9	270	28.6	228.6	157	23.8
200	150	279	342.9	270	28.6	279.4	216	25.4
250	25	305	406.4	324	30.2	108	51	14.3
250	40	305	406.4	324	30.2	127	73	17.5
250	50	305	406.4	324	30.2	152.4	92	19
250	80	305	406.4	324	30.2	190.5	127	23.8
250	100	305	406.4	324	30.2	228.6	157	23.8
250	150	305	406.4	324	30.2	279.4	216	25.4
250	200	305	406.4	324	30.2	342.9	270	28.6
300	50	356	482.6	381	31.7	152.4	92	19
300	80	356	482.6	381	31.7	190.5	127	23.8
300	100	356	482.6	381	31.7	228.6	157	23.8
300	150	356	482.6	381	31.7	279.4	216	25.4
300	200	356	482.6	381	31.7	342.9	270	28.6
300	250	356	482.6	381	31.7	406.4	324	30.2

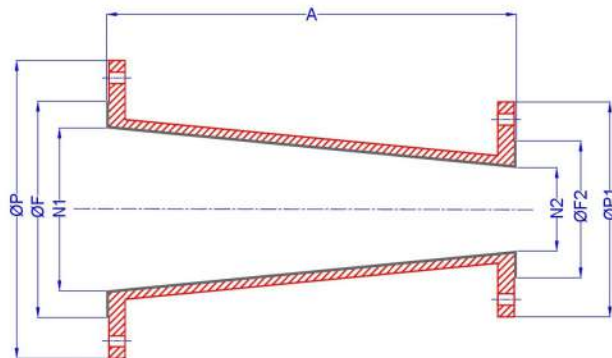

Features

- Rugged construction
- Resistance to all corrosive chemicals
- Optimum quality

Test & Inspection Data

- Hydraulic Test : 20kg/cm After Lining
- Spark Test : 15 KV D.C After Lining

Ablaze Polymer & Lining

E - 52/7 Sardar Industrial Estate
Ajwa Road, Vadodara-19, Gujarat, India.

Contact : 91 265 2572420

Email : sales@ablazelining.com